

## FAÇADES

COMPLEMENTARY PRODUCTS,  
TOOLS AND ACCESSORIES

### ■ DASH-BOND COAT



### PRODUCT FEATURES

- ▶ Ready-to-use
- ▶ Highly granular consistency
- ▶ Optimum bonding

### WATER DOSAGE

- ▶ 400 g/m<sup>2</sup>

### CONSUMPTION

- ▶ 2 kg/m<sup>2</sup>/mm approx

### PACKAGING

- ▶ 20 kg bucket.
- ▶ Pallet containing 27 buckets

### STORAGE

- ▶ 12 months

from date of manufacture if stored in unopened original packaging in dry conditions and away from frost and high temperatures

### WARRANTY

- ▶ Manufacturer's liability

**TECHNICAL ASSISTANCE:** ParexGroup S.A. will, on request, provide information and assistance to companies in relation to the specific use of a product. Such assistance shall not be assimilated with structural design and conception, nor the compliance of substrates, nor as a control of usage rules in force.

**TECHNICAL DATA SHEET ISSUED - September 2017**

The information provided in this document results from our knowledge of the products and our experience. Prior to application, customers and users are requested to check that they are in possession of the latest version of this document. Please check for updates at [www.parexlanko.com](http://www.parexlanko.com)

**PAREXGROUP S.A.** 19 place de la Résistance - CS 50053  
92445 Issy-les-Moulineaux Cedex - Tél. (33) 01 41 17 20 00  
Technical information : 0 826 08 68 78 (0.15 €/min + phone call price)

# PAREXLANKO

# MICRO-GOBETIS 3000



### DESCRIPTION

- Enhances bonding of one-coat renders to substrates.
- Reduces the risk of air pockets in render.

### USES


#### ■ PERMISSIBLE SUBSTRATES

- Smooth, low-absorbency substrates such as concrete and certain float-finished mortars.

### SPECIFICATIONS

- **Appearance:** pink viscous liquid
- **Composition:** acrylic copolymer dispersion of mineral filler and specific admixtures.
- **Dry content:** 65
- **Density:** 1.5 ± 0.1
- **pH:** 8.5

### PERFORMANCE CHARACTERISTICS

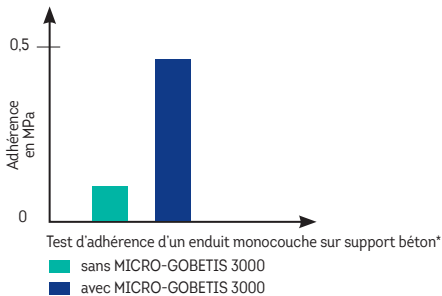

\* Average laboratory values at 20°C and 65% relative humidity.

### INSTRUCTIONS

#### ■ APPLICATION

- Apply in one single coat with a roller or brush.
- One-coat render can be applied as soon as **MICRO GOBETIS 3000** has dried, i.e. after 1 to 24 hours, depending on weather conditions.
- Mix the product thoroughly before use to ensure an even consistency.

### CONSUMPTION

- 400 g/m<sup>2</sup> depending on substrate surface condition.

### PRECAUTIONS

- **MICRO GOBETIS 3000** may be diluted by adding a maximum of 0.5 litres water.
- Concrete substrates must be dry, clean, sound, dust-free and without any traces of mould-release oil or powdery deposits.
- Do not apply to damp substrates.
- Temperature range for use: + 5°C to + 30°C.
- This product is totally safe to handle.
- Please refer to the Safety Data Sheet.